

## Kombinations-Taster

### Combination pushbutton


#### Technische Daten

Flächeneinbautaster mit integrierter weißer LED-Beleuchtung und Namensschild.

- Anschlussart: Schraubkontakt
- Schaltleistung: 5A/125 V AC/DC
- hintergrundbeleuchtet
- LED-Beleuchtung über den Klingeltrafo:  
8 - 16 V AC/DC
- Durchbruchmaß: 62 x 18 mm
- Außenmaß: 65 x 22 mm
- Druckkraft: 180 N
- Mechanische Lebensdauer: 1.000.000 Zyklen,  
elektrische Lebensdauer: 50.000 Zyklen
- Temperaturbereich: - 40° bis 85° C
- Schutzart Mikroschalter: IP 50

Anschlüsse für Klingeltaster und Beleuchtung sind auf der Rückseite des Kombitasters beschriftet.

Der Transformator muss ausreichend Leistung für die Stromaufnahme der LED-Beleuchtung zur Verfügung stellen. 10 Taster benötigen ca. 160 mA.

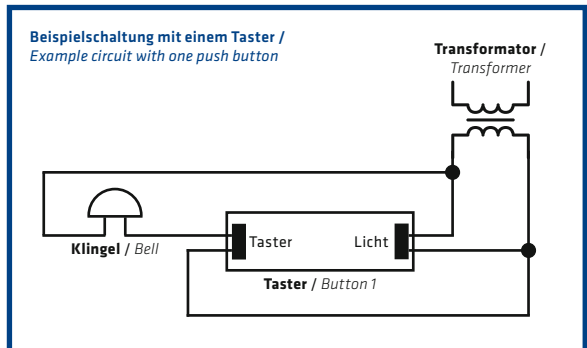


#### Technical Data

*Recessed panel pushbutton with integrated white LED illumination and nameplate.*

- *Connection type: Screw terminals*
- *Switching voltage : 5A/125 V AC/DC*
- *backlit*
- *backlight powered by bell transformer:*  
8 - 16 V AC/DC
- *Opening dimensions: 62 x 18 mm*
- *Outer dimensions: 65 x 22 mm*
- *Compressive force: 180 N*
- *Mechanical life: 1.000.000 switching cycles,*  
*electrical life: 50.000 switching cycles*
- *Temperature range: - 40° to 85° C*
- *Protection class micro switch: IP 50*

*Connectors for lighting and bell are labeled on the backside of the unit.*

*The transformer should provide sufficient power for the current consumption of the LED lighting. 10 pushbuttons require approx. 160 mA.*

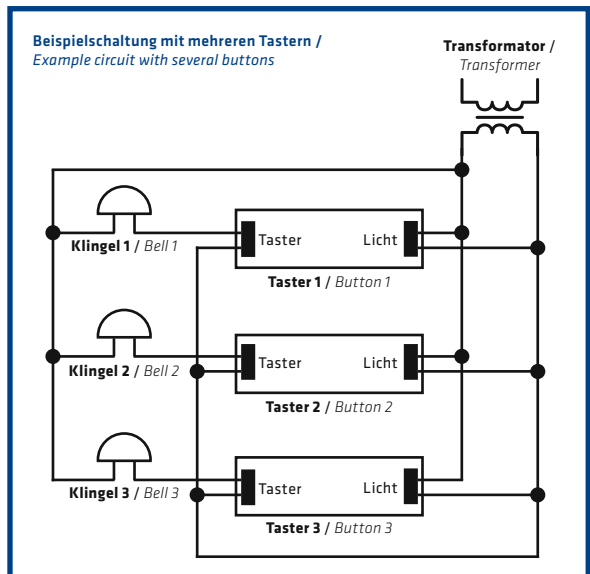

Modell- und technische Änderungen sowie Irrtümer vorbehalten. Alle Inhalte sind urheberrechtlich geschützt.  
Model, program and technical changes are subject to change. All contents are protected by copyright.